




RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

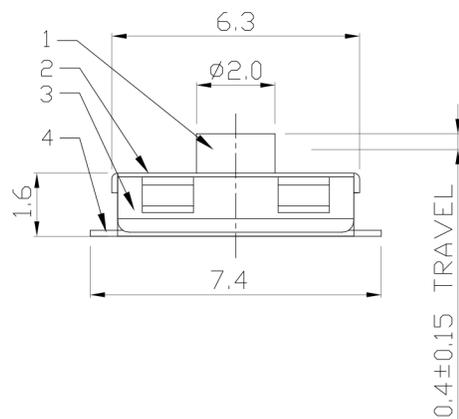

P.C.B MOUNTING PATTERN DIMENSION





CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100mΩ Max.	
Travel	0.4±0.15mm	
Operating Force	180±50gf	250±100gf
Operating Life(cycles)	50,000	

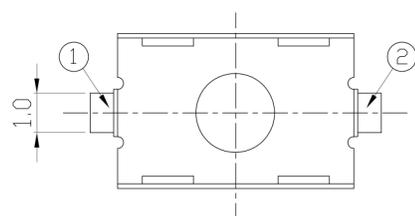

NO.	PART NAME	MATERIAL	QTY.	FINISHING
5	CONTACT	SUS	1	NATURAL
4	TERMINAL	BRASS STRIP	2	Ag PLATED
3	CASE	NYLON+F.G	1	BLACK
2	COVER	SUS	1	WASHING
1	KNOB	RUBBER	1	BLACK

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.

WITHIN 1.5mm ±0.1	UNITS	东莞市腾兴电子有限公司 TITLE: TACT SWITCH PART NO.: AT-1111 SERIES DR: Ricky 2017/09/22 DWG NO.: AZJ-1111 CHKD: Ricky 2017/09/22 SCALE: 4:1 SHEET: 1/1 REV: A CUSTOMER DRAWING			
OVER 1.5mm ±0.2	MAT'L				
	SEE NOTE				
	FINISH				
	SEE NOTE	Q'TY	APPD:		

