



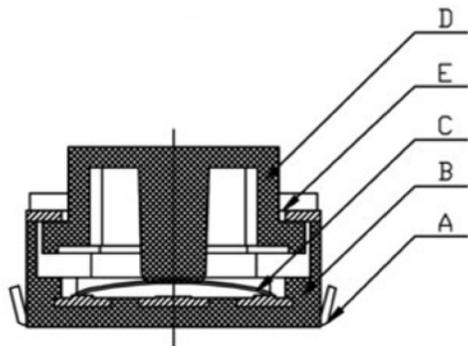

RoHS
Compliant
2002/95/EC





| REV. | ECN. NO. | APPD. |
|------|----------|-------|
| | | |
| | | |

DIMENSIONS

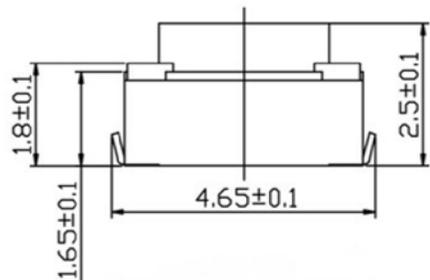

P.C.B MOUNTING PATTERN DIMENSION
The following soldering patterns are recommended for reflow soldering

CIRCUIT DIAGRAM

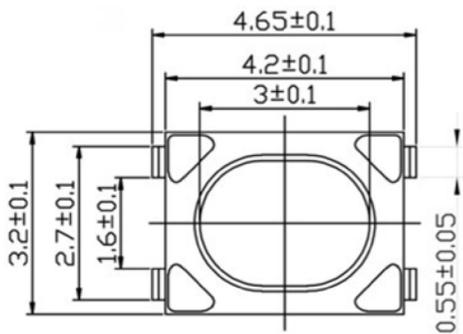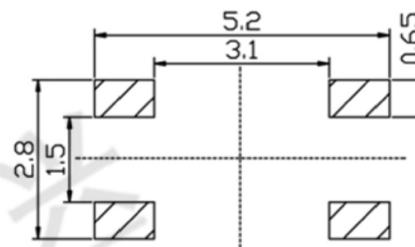

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

| | | | |
|------------------------|--------------|----------|----------|
| Rating | DC 12V 50mA | | |
| Contact Resistance | 100mΩ Max. | | |
| Travel | 0.15 ± 0.1mm | | |
| Operating Force | 160±50gf | 250±50gf | 400±50gf |
| Operating Life(cycles) | 50,000 | | |

Bill of materials:

| NO. | PARTS | MATERIAL | Q'TY | FINISHING | X ±0.3 | X. ±2' | UNITS | mm | 东莞市腾兴电子有限公司 | | | | |
|-----|----------|--------------------------|------|--------------|--------|--------|-------|--------------------|-------------------------------|------------------------------|-------|------|------------------|
| E | COVER | STAINLESS STEEL T=0.15mm | 1 | WASHING | | | | | TITLE: TACT SWITCH | PART NO.: AT-1182U SERIES | | | |
| D | KNOB | LCP | 1 | WHITE | | | | MAT'L SEE NOTE | | | | | |
| C | CONTACT | STAINLESS STEEL | 2 | AG PLATED | | | | | DR: <i>Ricky</i> 2018/06/11 | DWG NO.: AKS-1182U | | | |
| B | CASE | LCP | 1 | WHITE | | | | FINISH SEE NOTE | CHKD: <i>Ricky</i> 2018/06/11 | | | | |
| A | TERMINAL | PHOSPHOR BRONZE T=0.12mm | 1 | NI/AG PLATED | | | | Q'TY | APPD: | SCALE | SHEET | REV. | CUSTOMER DRAWING |
| | | | | | | | | | | 1:1 | 1/1 | A | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.

