



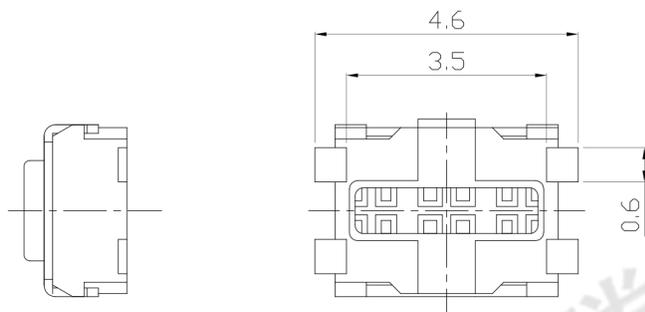

RoHS
Compliant
2002/95/EC



REV.	ECN. NO.	APPD.

DIMENSIONS

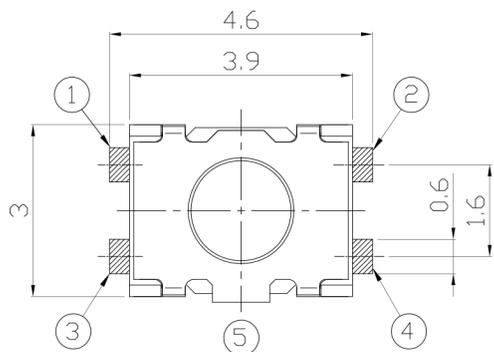


P.C.B MOUNTING PATTERN DIMENSION

The following soldering patterns are recommended for reflow soldering

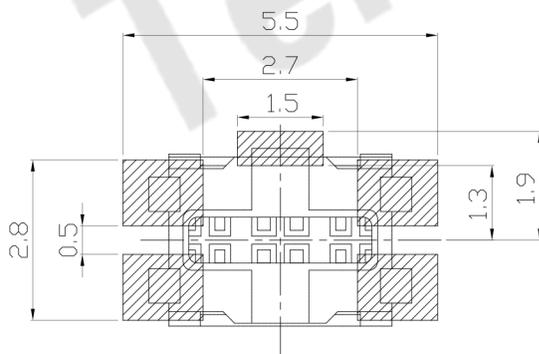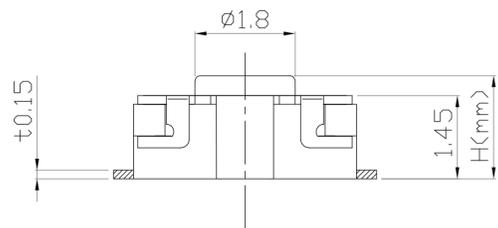

PRODUCT IMAGE




MODEL CODE

AT-1185BP1-G-

	H
A	1.8
B	2.0

CIRCUIT DIAGRAM



ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA	
Contact Resistance	100m Ω Max.	
Travel	0.2 \pm 0.1mm	
Operating Force	160 \pm 30gf	250 \pm 50gf
Operating Life(cycles)	100,000	

.X \pm 0.3	X. \pm 2'	UNITS mm
		MAT'L SEE NOTE
		FINISH SEE NOTE
		Q'TY
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.</small>		

东莞市腾兴电子有限公司

TITLE: TACT SWITCH	PART NO.: AT-1185BP1-G SERIES
DR: Ricky 2014/03/31	DWG NO.: ASI-1185BP1-G
CHKD: Ricky 2014/03/31	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 A