

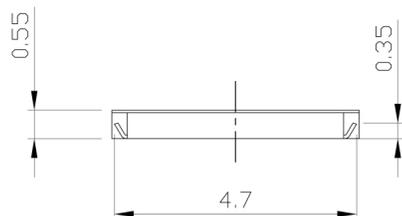


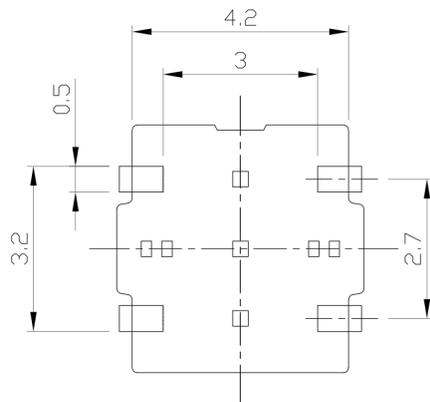

**RoHS Compliant**  
2002/95/EC


REV.	ECN. NO.	APPD.

### DIMENSIONS

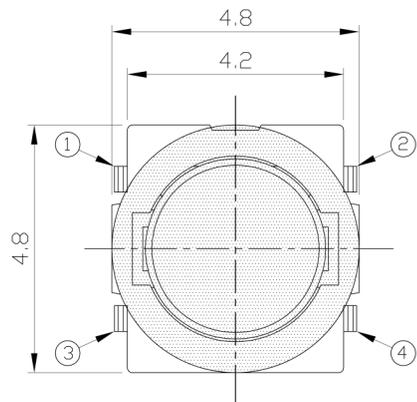


### P.C.B MOUNTING PATTERN DIMENSION


The following soldering patterns are recommended for reflow soldering

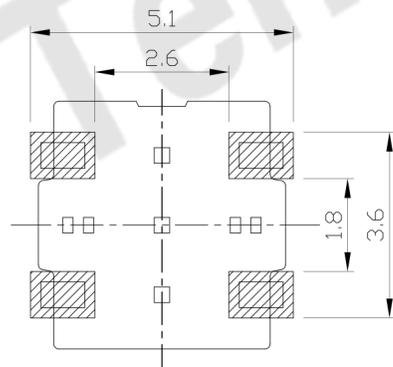

### CIRCUIT DIAGRAM



### PRODUCT IMAGE




### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

Rating	DC 12V 50mA		
Contact Resistance	100mΩ Max.		
Travel	0.2 ± 0.1mm		
Operating Force	160±30gf	250±50gf	
Operating Life(cycles)	100,000		

.X ±0.3	X. ±2'	UNITS mm
		MAT'L SEE NOTE
		FINISH SEE NOTE
		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC.



**东莞市腾兴电子有限公司**

TITLE: TACT SWITCH	PART NO.: AT-1197A SERIES
DR: Ricky 2014/04/01	DWG NO.: ASI-1197A
CHKD: Ricky 2014/04/01	SCALE SHEET REV. CUSTOMER DRAWING
APPD:	1:1 1/1 A