



RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.





A

B


C

D

E

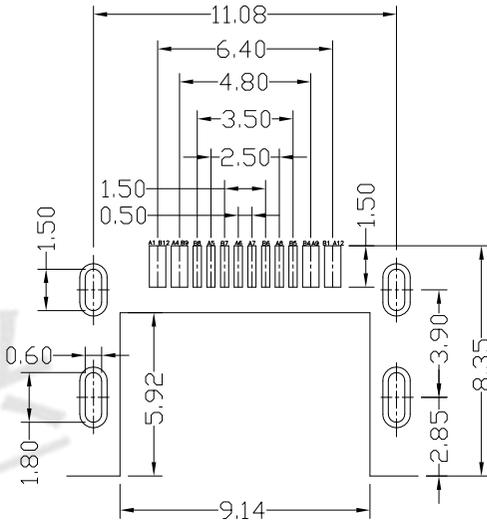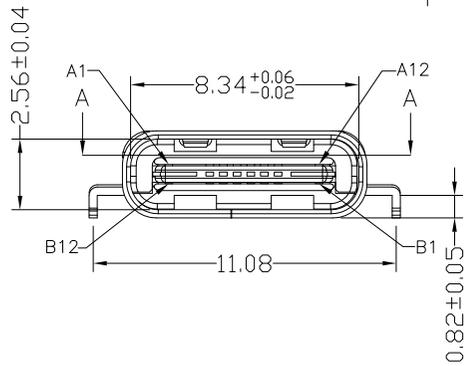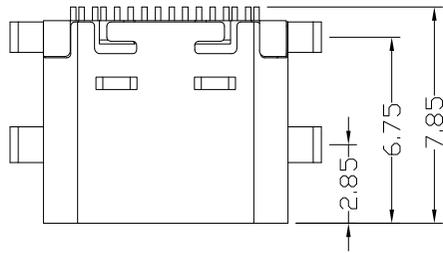

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

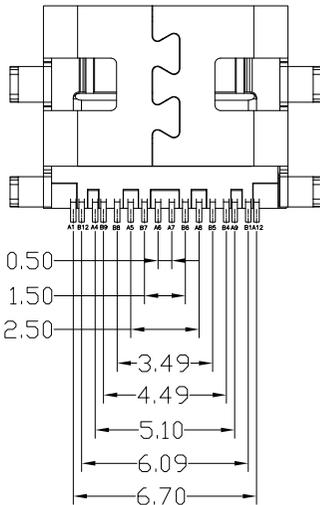


A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

NOTES:

- ELECTRICAL:
 - CURRENT RATING: 3AMP MAX;
 - INSULATION RESISTANCE: 100MΩ MIN 250V DC;
 - CONTACT RESISTANCE: 40mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC;
 - OPERATING TEMPERATURE: -30°C TO +85°C.
- Mechanical:
 - Mating Force: 20N MAX.
 - Unmating Force: 6N MIN.
- DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

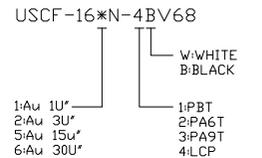

5				.X ±0.30	.X' ±1'	UNITS	东莞市腾兴电子有限公司					
4	HOOK	STAINLESS STEEL	1	.XX ±0.20	.XX'	MAT'L	TITLE: USB TYPE CF 短体7.35 单排16P 沉板0.8 无弹		PART NO.: USCf-16XN-4BV68			
3	SHELL	STAINLESS STEEL	1	.XXX ±0.10	.XXX'	SEE NOTE	DR: Ricky 2017/12/08		DWG NO.: AII-V68			
2	TERMINAL	COPPER ALLOY	16			SEE NOTE	CHKD: Ricky 2017/12/08		SCALE	SHEET	REV.	CUSTOMER
1	HOUSING	LCP+30%GF	1				APPD:		1:1	1/1	B	DRAWING
NO	PARTS	MATERIAL	QTY	FINISHING								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC

