




RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

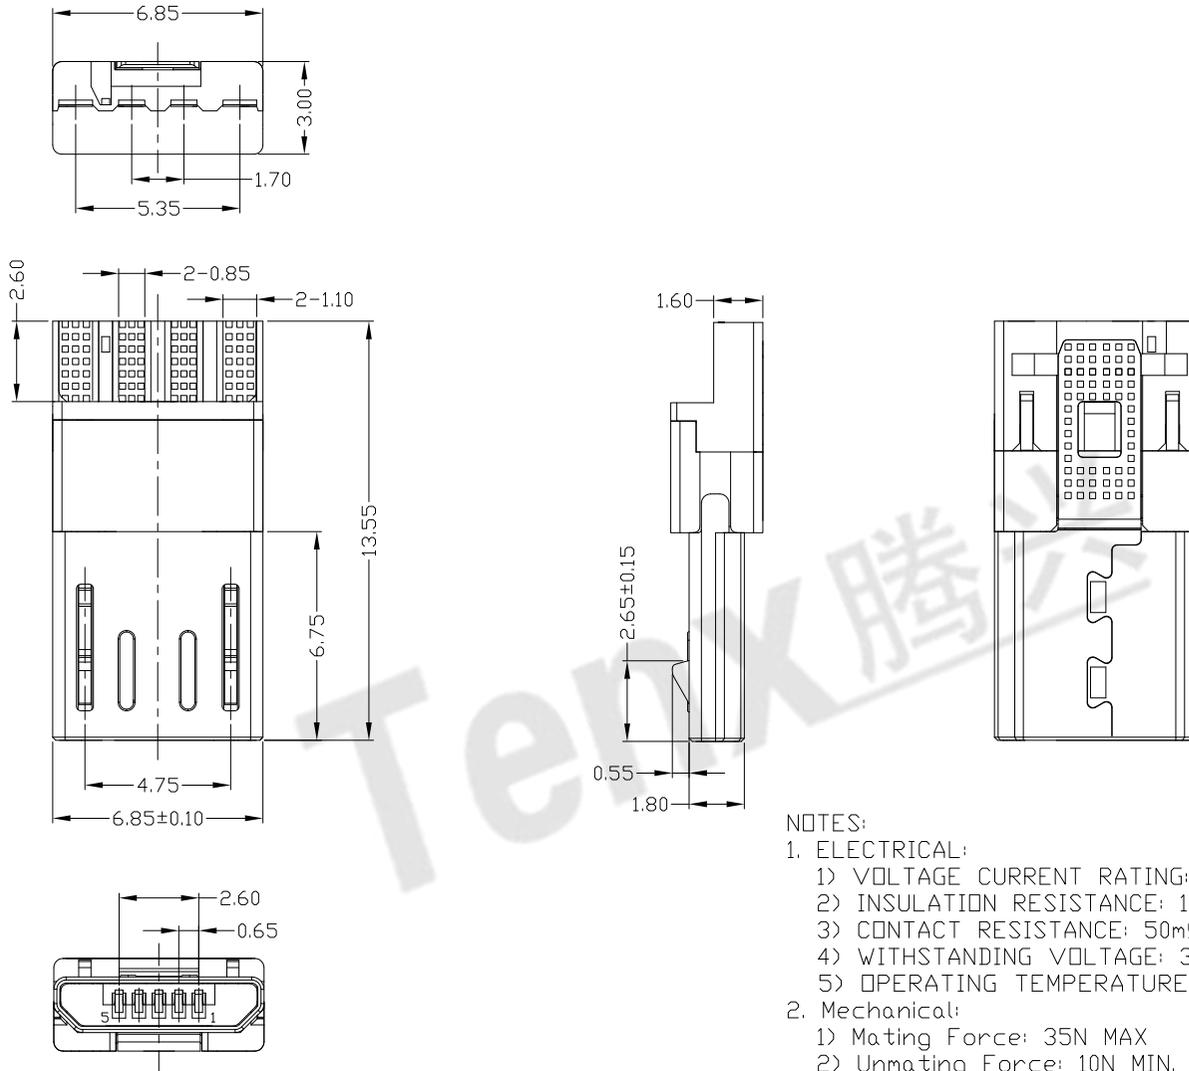

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2.0AMP,100V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 50mΩ MAX;
  - WITHSTANDING VOLTAGE: 30V AC;
  - OPERATING TEMPERATURE:-25°C TO +80°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

MUYM-05\*N-4BSU03

1-Au 1U'  
6-Au 30U'

W:WHITE  
B:BLACK

1-PBT  
2-PA6T  
3-PA9T  
4-LCP


Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X ±0.15	Ang1°	UNITS	mm	东莞市腾兴电子有限公司						
4	HOOK	STAINLESS STEEL	2		.XX ±0.10		MAT'L		TITLE: MICRO USB BM 一排焊线式 前五后四(无弹 T=3.0)焊盘加宽		PART NO.: MUYM-05*N-4BSU03				
3	HOUSING	LCP+30%GF	1	UL94V-0	.XXX ±0.05		SEE NOTE		DR: Ricky 2018/1/31		DWG NO.: AII-SU03				
2	SHELL	STAINLESS STEEL	1	PLATED NICKEL			FINISH		CHKD: Ricky 2018/1/31		SCALE	SHEET	REV.	CUSTOMER	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			SEE NOTE		APPD:		4:1	1/1	B	DRAWING	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNTECH INC			Q'TY							



RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

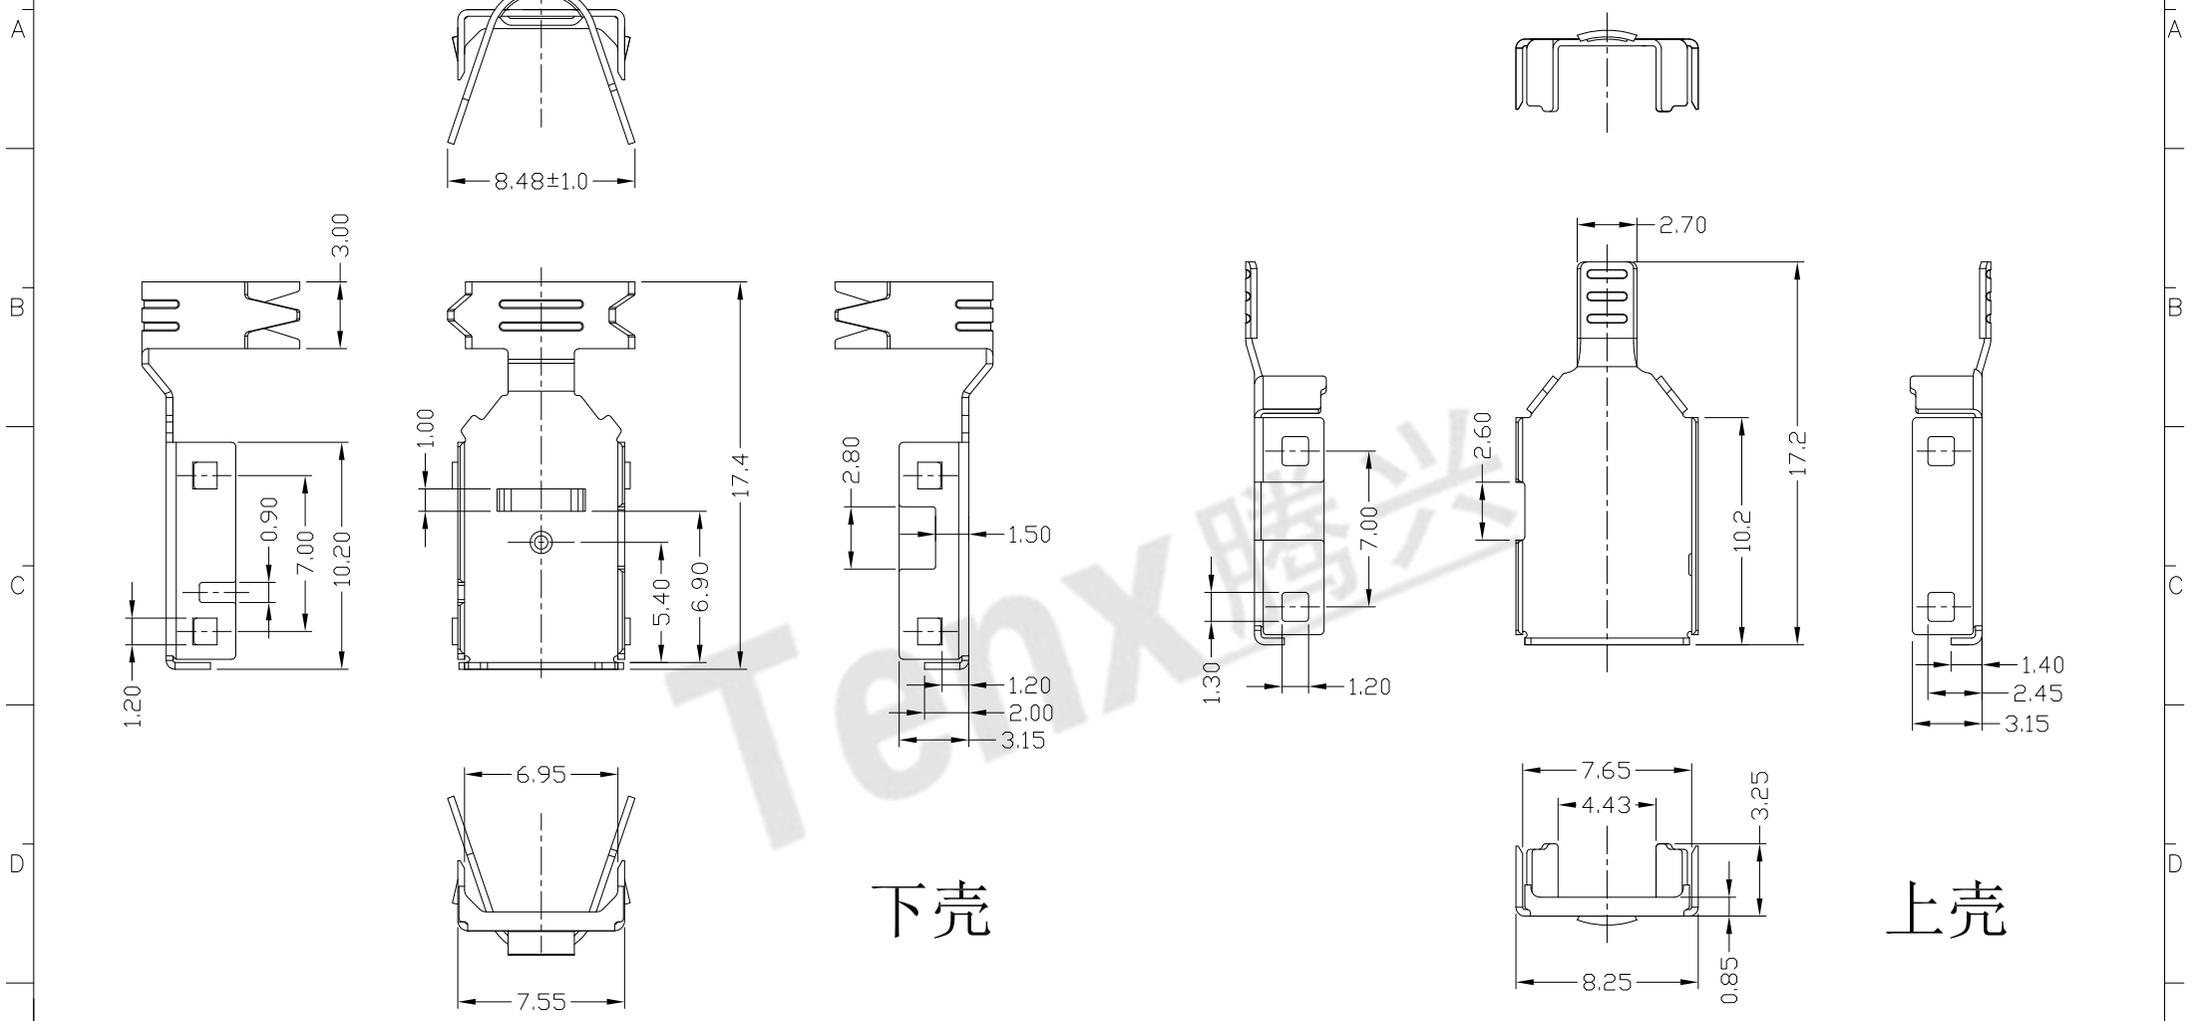

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	MAT'L	FINISH	Q'TY	DR:	CHKD:	APPD:	TITLE:	PART NO.:	DWG NO.:	SCALE	SHEET	REV.	CUSTOMER
1	SHELL	SPCC	1	PLATED NICKEL	.X ± 0.15	Ang1°	SEE NOTE	SEE NOTE	DR: Ricky	2018/1/31	2018/1/31	MICRO USB BM 一排焊线式 前五后四(无弹 T=3.0)焊盘加宽 外壳	MUYM-05*N-4BSU03-C	AII-SU03-C	4:1	1/1	B	
					.XX ± 0.10													
					.XXX ± 0.05													
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC													

东莞市腾兴电子有限公司

SCALE: 4:1 SHEET: 1/1 REV: B CUSTOMER DRAWING