





RoHS
Compliant
2002/95/EC

PART NO: RI - G - -



REV.	ECN. NO.	APPD.

DIMENSION:(UNIT:mm/inches)

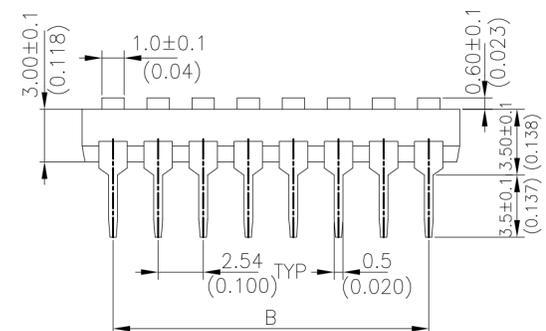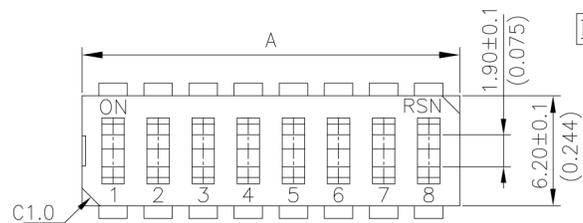

$$B \pm 0.10 = 2.54 \times (P-1)$$

$$(B \pm 0.004 = 0.10 \times (P-1))$$

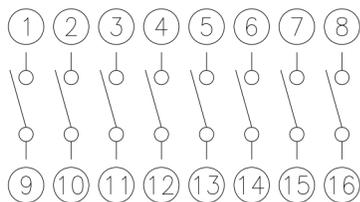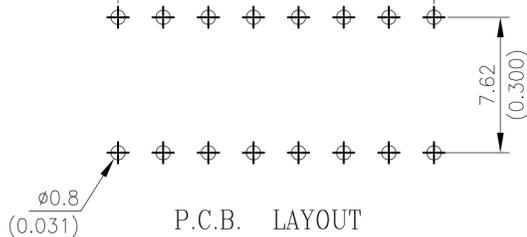


Actuator Type:
=Recessed Actuator(Top Tape Sealed Available Only)

Seal:
=Top Tape Sealed



Terminal Type:
=Splay Terminal
=Straight Terminal

Terminal:
=Gold Plating
Number of positions:

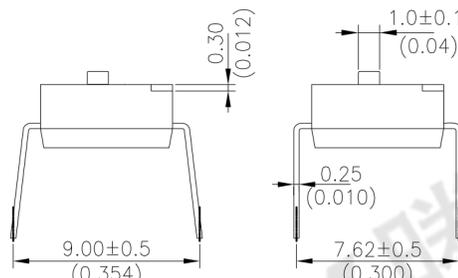

RI-G-S

RI-G-H

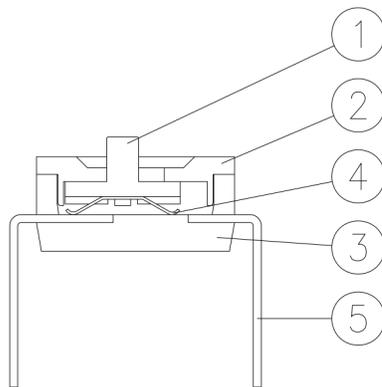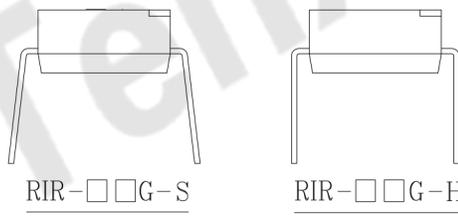

CONSTRUCTION

Prod No.	No.ofPOS	DIM.A	DIM.B
RI/RIR-01	01	3.48(0.137)	-----
RI/RIR-02	02	6.02(0.237)	2.54(0.100)
RI/RIR-03	03	8.56(0.337)	5.08(0.200)
RI/RIR-04	04	11.10(0.437)	7.62(0.300)
RI/RIR-05	05	13.64(0.537)	10.16(0.400)
RI/RIR-06	06	16.18(0.637)	12.70(0.500)
RI/RIR-07	07	18.72(0.737)	15.24(0.600)
RI/RIR-08	08	21.26(0.837)	17.78(0.700)
RI/RIR-09	09	23.80(0.937)	20.32(0.800)
RI/RIR-10	10	26.34(1.037)	22.86(0.900)
RI/RIR-12	12	31.42(1.237)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 NYLON	MOLDED WHITE
2	COVER	UL94V-0 NYLON	MOLDED BLACK
3	BASE	UL94V-0 NYLON	MOLDED BLACK
4	CONTACT	BERYLLIUM COPPER	GOLD PLATED AT CONTACT AREA
5	TERMINAL	BRASS	GOLD PLATING

尺寸範圍	容許值	UNITS	东莞市腾兴电子有限公司			
0-4	±0.05	mm(IN)	TITLE: MACHINE INSERT TABLE TYPE DIP SWITCH		PART NO.: RI/RIR SERIES	
4-16	±0.1	MAT'L	DR: Ricky 2014/04/08		DWG NO.: ATR-RI	
16-50	±0.15	FINISH	CHKD: Ricky 2014/04/08		SCALE	SHEET
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNO TECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNO TECH INC.			APPD:		1:1	1/1
Q'TY			APPD:		REV. A	CUSTOMER DRAWING